


Computer Vision - Lecture 3

Linear Filters

23.10.2014

Bastian Leibe
 RWTH Aachen
<http://www.vision.rwth-aachen.de>
 leibe@vision.rwth-aachen.de

Demo "Haribo Classification"

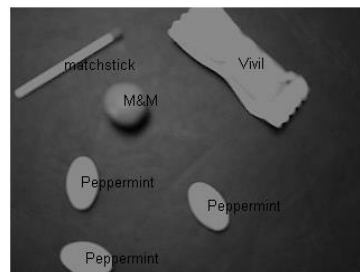

Code available on the class website...

B. Leibe

You Can Do It At Home...

Accessing a webcam in Matlab:

```
function out = webcam
% uses "Image Acquisition Toolbox",
adaptorName = 'winvideo';
vidFormat = 'I420_320x240';
vidObj1= videoinput(adaptorName, 1, vidFormat);
set(vidObj1, 'ReturnedColorSpace', 'rgb');
set(vidObj1, 'FramesPerTrigger', 1);
out = vidObj1 ;

cam = webcam();
img=getsnapshot(cam);
```



B. Leibe

Course Outline

- Image Processing Basics
 - Image Formation
 - Binary Image Processing
 - Linear Filters
 - Edge & Structure Extraction
 - Color
- Segmentation
- Local Features & Matching
- Object Recognition and Categorization
- 3D Reconstruction
- Motion and Tracking

B. Leibe

Motivation


- Noise reduction/image restoration
- Structure extraction



B. Leibe

Topics of This Lecture

- Linear filters
 - What are they? How are they applied?
 - Application: smoothing
 - Gaussian filter
 - What does it mean to filter an image?
- Nonlinear Filters
 - Median filter
- Multi-Scale representations
 - How to properly rescale an image?
- Filters as templates
 - Correlation as template matching



B. Leibe

Computer Vision WS 14/15

Common Types of Noise

- Salt & pepper noise
 - Random occurrences of black and white pixels
- Impulse noise
 - Random occurrences of white pixels
- Gaussian noise
 - Variations in intensity drawn from a Gaussian ("Normal") distribution.
- **Basic Assumption**
 - Noise is *i.i.d.* (independent & identically distributed)

Original Salt and pepper noise
Impulse noise Gaussian noise

B. Leibe Source: Steve Seitz

Computer Vision WS 14/15

Gaussian Noise

Ideal Image Noise process Gaussian i.i.d. ("white") noise:
 $f(x,y) = \overline{f(x,y)} + \eta(x,y)$
 $\eta(x,y) \sim \mathcal{N}(\mu, \sigma)$

```
>> noise = randn(size(im)).*sigma;
>> output = im + noise;
```

Slide credit: Kristen Grauman Image Source: Martial Hebert

Computer Vision WS 14/15

First Attempt at a Solution

- Assumptions:
 - Expect pixels to be like their neighbors
 - Expect noise processes to be independent from pixel to pixel ("i.i.d. = independent, identically distributed")
- Let's try to replace each pixel with an average of all the values in its neighborhood...

Computer Vision WS 14/15

Moving Average in 2D

$F[x, y]$

$G[x, y]$

B. Leibe Source: S. Seitz

Computer Vision WS 14/15

Moving Average in 2D

$F[x, y]$

$G[x, y]$

B. Leibe Source: S. Seitz

Computer Vision WS 14/15

Moving Average in 2D

$F[x, y]$

$G[x, y]$

B. Leibe Source: S. Seitz

Computer Vision WS 14/15

Moving Average in 2D

RWTH AACHEN UNIVERSITY

$F[x, y]$

$G[x, y]$

14
Source: S. Seitz

Computer Vision WS 14/15

Moving Average in 2D

RWTH AACHEN UNIVERSITY

$F[x, y]$

$G[x, y]$

15
Source: S. Seitz

Computer Vision WS 14/15

Moving Average in 2D

RWTH AACHEN UNIVERSITY

$F[x, y]$

$G[x, y]$

16
Source: S. Seitz

Computer Vision WS 14/15

Correlation Filtering

RWTH AACHEN UNIVERSITY

- Say the averaging window size is $2k+1 \times 2k+1$:

$$G[i, j] = \frac{1}{(2k+1)^2} \sum_{u=-k}^k \sum_{v=-k}^k F[i+u, j+v]$$

Attribute uniform weight to each pixel Loop over all pixels in neighborhood around image pixel $F[i, j]$
- Now generalize to allow different weights depending on neighboring pixel's relative position:

$$G[i, j] = \sum_{u=-k}^k \sum_{v=-k}^k H[u, v] F[i+u, j+v]$$

Non-uniform weights

17
Slide credit: Kristen Grauman

Computer Vision WS 14/15

Correlation Filtering

RWTH AACHEN UNIVERSITY

$$G[i, j] = \sum_{u=-k}^k \sum_{v=-k}^k H[u, v] F[i+u, j+v]$$

- This is called **cross-correlation**, denoted $G = H \otimes F$
- Filtering an image
 - Replace each pixel by a weighted combination of its neighbors.
 - The filter "kernel" or "mask" is the prescription for the weights in the linear combination.

H

(0,0)

F
(N,N)

18
Slide credit: Kristen Grauman

Computer Vision WS 14/15

Convolution

RWTH AACHEN UNIVERSITY

- Convolution:
 - Flip the filter in both dimensions (bottom to top, right to left)
 - Then apply cross-correlation

$$G[i, j] = \sum_{u=-k}^k \sum_{v=-k}^k H[u, v] F[i-u, j-v]$$

$G = H \star F$

↑
Notation for convolution operator

H

F
(N,N)

19
Slide credit: Kristen Grauman

Computer Vision WS 14/15

Correlation vs. Convolution

Correlation

$$G[i, j] = \sum_{u=-k}^k \sum_{v=-k}^k H[u, v] F[i + u, j + v]$$

Matlab: `filter2`, `imfilter`

$$G = H \otimes F$$

Convolution

$$G[i, j] = \sum_{u=-k}^k \sum_{v=-k}^k H[u, v] F[i - u, j - v]$$

Matlab: `conv2`

Note

- If $H[-u, -v] = H[u, v]$, then correlation = convolution.

Note the difference!

Slide credit: Kristen Grauman, B. Leibe

Computer Vision WS 14/15

Shift Invariant Linear System

Shift invariant:

- Operator behaves the same everywhere, i.e. the value of the output depends on the pattern in the image neighborhood, not the position of the neighborhood.

Linear:

- Superposition: $h * (f_1 + f_2) = (h * f_1) + (h * f_2)$
- Scaling: $h * (kf) = k(h * f)$

Slide credit: Kristen Grauman, B. Leibe

Computer Vision WS 14/15

Properties of Convolution

- Linear & shift invariant
- Commutative: $f * g = g * f$
- Associative: $(f * g) * h = f * (g * h)$
 - Often apply several filters in sequence: $((a * b_1) * b_2) * b_3$
 - This is equivalent to applying one filter: $a * (b_1 * b_2 * b_3)$
- Identity: $f * e = f$
 - for unit impulse $e = [\dots, 0, 0, 1, 0, 0, \dots]$.
- Differentiation: $\frac{\partial}{\partial x}(f * g) = \frac{\partial f}{\partial x} * g$

Slide credit: Kristen Grauman, B. Leibe

Computer Vision WS 14/15

Averaging Filter

What values belong in the kernel $H[u, v]$ for the moving average example?

$$F[x, y] \otimes H[u, v] = G[x, y]$$

0	0	0	0	0	0	0	0
0	0	90	90	90	90	90	0
0	0	90	90	90	90	90	0
0	0	90	90	90	90	90	0
0	0	90	90	90	90	90	0
0	0	90	90	90	90	90	0
0	0	90	90	90	90	90	0
0	0	90	90	90	90	90	0

 \otimes

1	1	1
1	?	1
1	1	1

 $=$

0	10	20	30	30

1/9 "box filter"

$$G = H \otimes F$$

Slide credit: Kristen Grauman, B. Leibe

Computer Vision WS 14/15

Smoothing by Averaging

depicts box filter: white = high value, black = low value

Original Filtered

"Ringing" artifacts!

Slide credit: Kristen Grauman, B. Leibe, Image Source: Forsyth & Ponce

Computer Vision WS 14/15

Smoothing with a Gaussian

Original Filtered

Slide credit: Kristen Grauman, B. Leibe, Image Source: Forsyth & Ponce

Computer Vision WS 14/15

Smoothing with a Gaussian - Comparison

The slide shows two images of grass. The left image is labeled 'Original' and the right image is labeled 'Filtered'. Above the images are two small squares representing Gaussian kernels: a small black square with a white dot in the center, and a larger black square with a white dot in the center. The 'Filtered' image is significantly smoother than the 'Original' image.

Original Filtered

B. Leibe Image Source: Forsyth & Ponce

26

Computer Vision WS 14/15

Gaussian Smoothing

- Gaussian kernel

$$G_{\sigma} = \frac{1}{2\pi\sigma^2} e^{-\frac{(x^2+y^2)}{2\sigma^2}}$$
- Rotationally symmetric
- Weights nearby pixels more than distant ones
 - This makes sense as 'probabilistic' inference about the signal
- A Gaussian gives a good model of a fuzzy blob

The slide includes a 3D surface plot of a Gaussian kernel, showing a smooth, bell-shaped peak. Below it is a 2D heatmap of the same kernel, showing a circular gradient from white in the center to black at the edges.

B. Leibe Image Source: Forsyth & Ponce

27

Computer Vision WS 14/15

Gaussian Smoothing

- What parameters matter here?
- **Variance** σ of Gaussian
 - Determines extent of smoothing

The slide shows two 3D surface plots of Gaussian kernels. The left plot is labeled ' $\sigma = 2$ with 30x30 kernel' and the right plot is labeled ' $\sigma = 5$ with 30x30 kernel'. The right plot shows a much wider and flatter peak compared to the left plot. A small 2D heatmap is also shown in the top right corner.

$\sigma = 2$ with 30x30 kernel $\sigma = 5$ with 30x30 kernel

Slide credit: Kristen Grauman B. Leibe

28

Computer Vision WS 14/15

Gaussian Smoothing

- What parameters matter here?
- **Size** of kernel or mask
 - Gaussian function has infinite support, but discrete filters use finite kernels

The slide shows two 3D surface plots of Gaussian kernels. The left plot is labeled ' $\sigma = 5$ with 10x10 kernel' and the right plot is labeled ' $\sigma = 5$ with 30x30 kernel'. The right plot shows a much wider and flatter peak compared to the left plot. A small 2D heatmap is also shown in the top right corner.

$\sigma = 5$ with 10x10 kernel $\sigma = 5$ with 30x30 kernel

- Rule of thumb: set filter half-width to about 3σ !

Slide credit: Kristen Grauman B. Leibe

29

Computer Vision WS 14/15

Gaussian Smoothing in Matlab

```

>> hsize = 10;
>> sigma = 5;
>> h = fspecial('gaussian' hsize, sigma);

>> mesh(h);
>> imagesc(h);

>> outim = imfilter(im, h);
>> imshow(outim);

```

The slide shows the Matlab code for Gaussian smoothing. Below the code is a small 3D mesh plot of a Gaussian kernel and a 2D heatmap. At the bottom, there are two images of a panda: the original image on the left and the smoothed image labeled 'outim' on the right, which is significantly smoother.

Slide credit: Kristen Grauman B. Leibe

30

Computer Vision WS 14/15

Effect of Smoothing

More noise →

The slide shows three images of a person's face with increasing noise levels. The first image is labeled ' $\sigma=0.05$ ', the second ' $\sigma=0.1$ ', and the third ' $\sigma=0.2$ '. The third image is labeled 'no smoothing'. To the right, there are three images of the same person's face, with the top one being the original and the bottom two being smoothed versions. A vertical arrow points downwards and is labeled 'Wider smoothing kernel'.

no smoothing

Wider smoothing kernel


Slide credit: Kristen Grauman B. Leibe Image Source: Forsyth & Ponce


31

Computer Vision WS 14/15

Efficient Implementation

- Both, the BOX filter and the Gaussian filter are separable:
 - First convolve each row with a 1D filter

$$g(x) = \frac{1}{\sqrt{2\pi}\sigma} \exp(-x^2/(2\sigma^2))$$

 - Then convolve each column with a 1D filter

$$g(y) = \frac{1}{\sqrt{2\pi}\sigma} \exp(-y^2/(2\sigma^2))$$

- Remember:
 - Convolution is linear - associative and commutative


$$g_x * g_y * I = g_x * (g_y * I) = (g_x * g_y) * I$$

Slide credit: Bernd Schiele B. Leibe 32

Computer Vision WS 14/15

Filtering: Boundary Issues

- What is the size of the output?
 - MATLAB: `filter2(g, f, shape)`
 - `shape = 'full'`: output size is sum of sizes of f and g
 - `shape = 'same'`: output size is same as f
 - `shape = 'valid'`: output size is difference of sizes of f and g

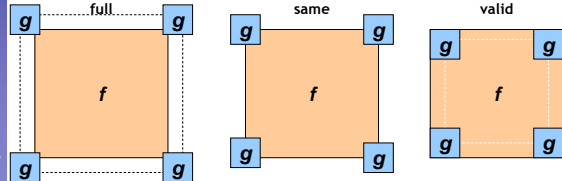


Slide credit: Svetlana Lazebnik B. Leibe 33

Computer Vision WS 14/15

Filtering: Boundary Issues

- How should the filter behave near the image boundary?
 - The filter window falls off the edge of the image
 - Need to extrapolate
 - Methods:
 - Clip filter (black)
 - Wrap around
 - Copy edge
 - Reflect across edge



B. Leibe Source: S. Marschner 34

Computer Vision WS 14/15

Filtering: Boundary Issues

- How should the filter behave near the image boundary?
 - The filter window falls off the edge of the image
 - Need to extrapolate
 - Methods (MATLAB):
 - Clip filter (black): `imfilter(f,g,0)`
 - Wrap around: `imfilter(f,g,'circular')`
 - Copy edge: `imfilter(f,g,'replicate')`
 - Reflect across edge: `imfilter(f,g,'symmetric')`

B. Leibe Source: S. Marschner 35

Computer Vision WS 14/15

Topics of This Lecture


- Linear filters
 - What are they? How are they applied?
 - Application: smoothing
 - Gaussian filter
 - What does it mean to filter an image?
- Nonlinear Filters
 - Median filter
- Multi-Scale representations
 - How to properly rescale an image?
- Filters as templates
 - Correlation as template matching

B. Leibe 36

Computer Vision WS 14/15

Why Does This Work?

- A small excursion into the Fourier transform to talk about spatial frequencies...

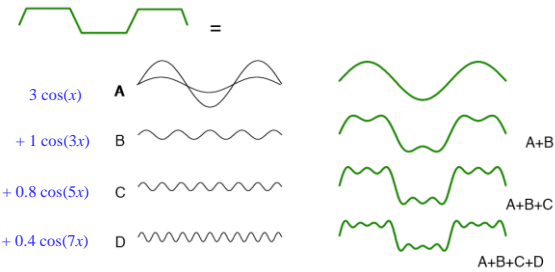

B. Leibe Source: Michal Irani 37

RWTH AACHEN UNIVERSITY

The Fourier Transform in Cartoons

- A small excursion into the Fourier transform to talk about spatial frequencies...

Frequency spectrum

A+B
A+B+C
A+B+C+D

38
B. Leibe
Source: Michel Irani

RWTH AACHEN UNIVERSITY

Fourier Transforms of Important Functions

- Sine and cosine transform to...

39
B. Leibe
Image Source: S. Chennay

RWTH AACHEN UNIVERSITY

Fourier Transforms of Important Functions

- Sine and cosine transform to "frequency spikes"

- A Gaussian transforms to...

40
B. Leibe
Image Source: S. Chennay

RWTH AACHEN UNIVERSITY

Fourier Transforms of Important Functions

- Sine and cosine transform to "frequency spikes"

- A Gaussian transforms to a Gaussian

- A box filter transforms to...

41
B. Leibe
Image Source: S. Chennay

RWTH AACHEN UNIVERSITY

Fourier Transforms of Important Functions

- Sine and cosine transform to "frequency spikes"

- A Gaussian transforms to a Gaussian

All of this is symmetric!

- A box filter transforms to a sinc

$\text{sinc}(x) = \frac{\sin x}{x}$

42
B. Leibe
Image Source: S. Chennay

RWTH AACHEN UNIVERSITY

Duality

- The better a function is localized in one domain, the worse it is localized in the other.

- This is true for any function

43
B. Leibe

RWTH AACHEN UNIVERSITY

Effect of Convolution

- Convolving two functions in the image domain corresponds to taking the product of their transformed versions in the frequency domain.

$$f \star g \rightarrow \mathcal{F} \cdot \mathcal{G}$$

- This gives us a tool to manipulate image spectra.
 - A filter attenuates or enhances certain frequencies through this effect.

44

RWTH AACHEN UNIVERSITY

Effect of Filtering

- Noise introduces high frequencies. To remove them, we want to apply a "low-pass" filter.
- The ideal filter shape in the frequency domain would be a box. But this transfers to a spatial sinc, which has infinite spatial support.
- A compact spatial box filter transfers to a frequency sinc, which creates artifacts.
- A Gaussian has compact support in both domains. This makes it a convenient choice for a low-pass filter.

45

RWTH AACHEN UNIVERSITY

Low-Pass vs. High-Pass

Original image

Low-pass filtered

High-pass filtered

46

RWTH AACHEN UNIVERSITY

Quiz: What Effect Does This Filter Have?

47

RWTH AACHEN UNIVERSITY

Sharpening Filter

Original

Sharpening filter
- Accentuates differences with local average

48

RWTH AACHEN UNIVERSITY

Sharpening Filter

before


after

49

Computer Vision WS 14/15

Topics of This Lecture

- Linear filters
 - What are they? How are they applied?
 - Application: smoothing
 - Gaussian filter
 - What does it *mean* to filter an image?
- Nonlinear Filters
 - Median filter
- Multi-Scale representations
 - How to properly rescale an image?
- Filters as templates
 - Correlation as template matching




B. Leibe

56

Computer Vision WS 14/15

Motivation: Fast Search Across Scales

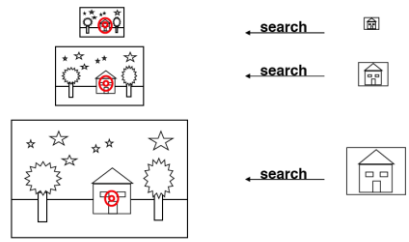

B. Leibe


57

Image Source: Irani & Barr

Computer Vision WS 14/15

Image Pyramid

Low resolution




High resolution

B. Leibe

58

Computer Vision WS 14/15

How Should We Go About Resampling?

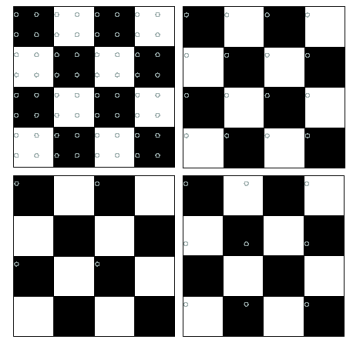

Let's resample the checkerboard by taking one sample at each circle.

In the top left board, the new representation is reasonable. Top right also yields a reasonable representation.

Bottom left is all black (dubious) and bottom right has checks that are too big.

B. Leibe


59

Image Source: Forsyth & Ponce

Computer Vision WS 14/15

Fourier Interpretation: Discrete Sampling

- Sampling in the spatial domain is like multiplying with a spike function.

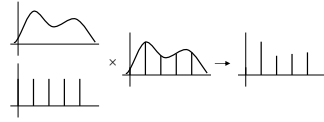

- Sampling in the frequency domain is like...

?

B. Leibe


60

Source: S. Chellappa


Computer Vision WS 14/15

Fourier Interpretation: Discrete Sampling

- Sampling in the spatial domain is like multiplying with a spike function.

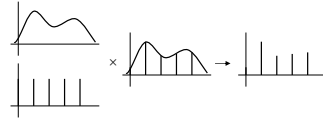







- Sampling in the frequency domain is like convolving with a spike function.

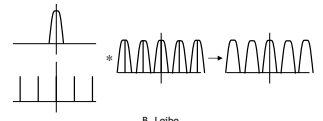

B. Leibe

61

Source: S. Chellappa

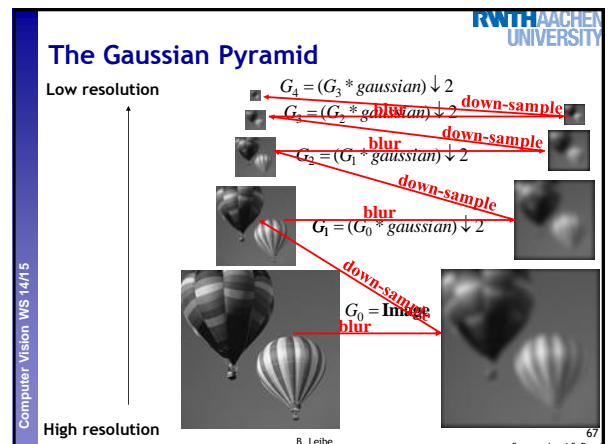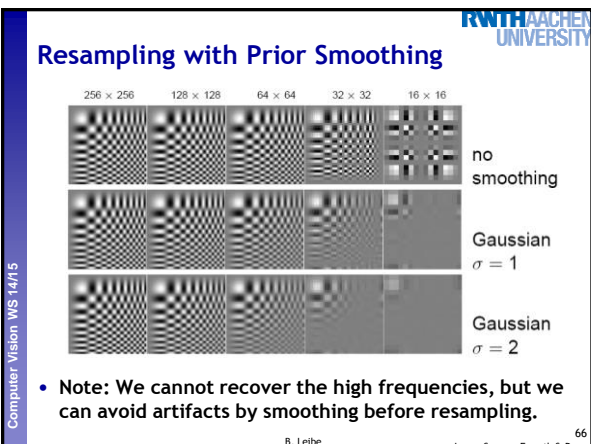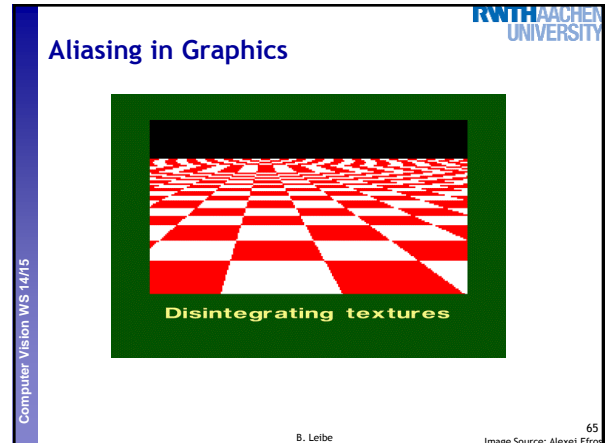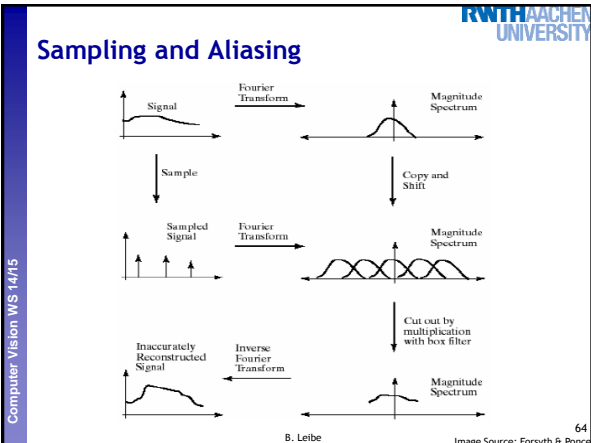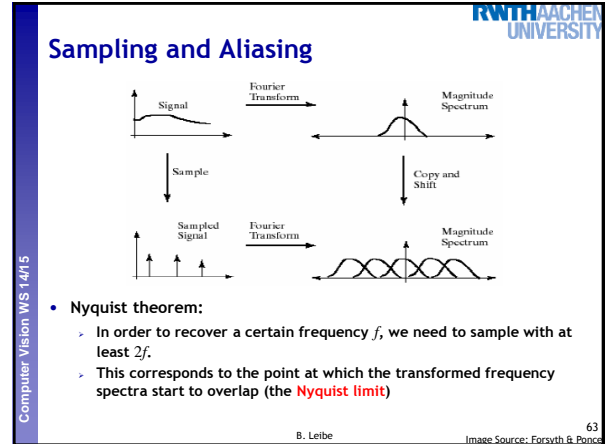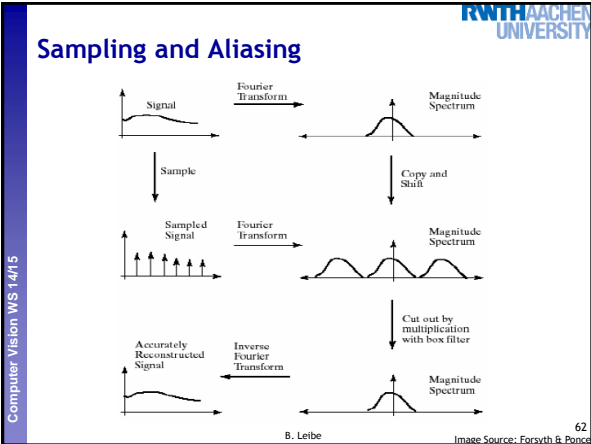

RWTH AACHEN UNIVERSITY

Gaussian Pyramid - Stored Information

All the extra levels add very little overhead for memory or computation!

Computer Vision WS 14/15

68
B. Leibe
Source: Irani & Barr

RWTH AACHEN UNIVERSITY

Summary: Gaussian Pyramid

- Construction: create each level from previous one
 - Smooth and sample
- Smooth with Gaussians, in part because
 - a Gaussian * Gaussian = another Gaussian
 - $G(\sigma_1) * G(\sigma_2) = G(\sqrt{\sigma_1^2 + \sigma_2^2})$
- Gaussians are low-pass filters, so the representation is redundant once smoothing has been performed.
 - ⇒ There is no need to store smoothed images at the full original resolution.

Computer Vision WS 14/15

69
Slide credit: David Lowe
B. Leibe

RWTH AACHEN UNIVERSITY

The Laplacian Pyramid

Gaussian Pyramid $L_i = G_i - \text{expand}(G_{i+1})$
 $G_i = L_i + \text{expand}(G_{i+1})$ Laplacian Pyramid

Why is this useful?

Computer Vision WS 14/15

70
Source: Irani & Barr

RWTH AACHEN UNIVERSITY

Laplacian ~ Difference of Gaussian

DoG = Difference of Gaussians

Cheap approximation - no derivatives needed.

Computer Vision WS 14/15

71
B. Leibe

RWTH AACHEN UNIVERSITY

Topics of This Lecture

- Linear filters
 - What are they? How are they applied?
 - Application: smoothing
 - Gaussian filter
 - What does it mean to filter an image?
- Nonlinear Filters
 - Median filter
- Multi-Scale representations
 - How to properly rescale an image?
- Filters as templates
 - Correlation as template matching

Computer Vision WS 14/15

72
B. Leibe

RWTH AACHEN UNIVERSITY

Note: Filters are Templates

- Applying a filter at some point can be seen as taking a dot-product between the image and some vector.
- Filtering the image is a set of dot products.
- Insight
 - Filters look like the effects they are intended to find.
 - Filters find effects they look like.


Computer Vision WS 14/15

73
B. Leibe

Computer Vision WS 14/15

RWTH AACHEN UNIVERSITY

Where's Waldo?



Scene

Template


Slide credit: Kristen Grauman B. Leibe

74

Computer Vision WS 14/15

RWTH AACHEN UNIVERSITY

Where's Waldo?



Detected template

Template


Slide credit: Kristen Grauman B. Leibe

75

Computer Vision WS 14/15

RWTH AACHEN UNIVERSITY

Where's Waldo?

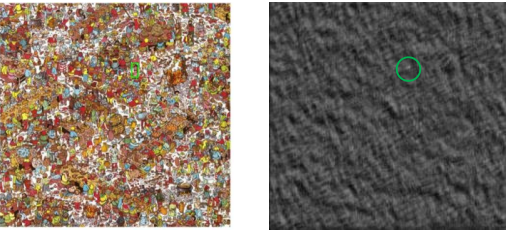

Detected template

Correlation map

Slide credit: Kristen Grauman B. Leibe

76


Computer Vision WS 14/15

RWTH AACHEN UNIVERSITY

Correlation as Template Matching

- Think of filters as a dot product of the filter vector with the image region
 - Now measure the angle between the vectors

$$a \cdot b = |a| |b| \cos \theta \quad \cos \theta = \frac{a \cdot b}{|a| |b|}$$
 - Angle (similarity) between vectors can be measured by normalizing length of each vector to 1.

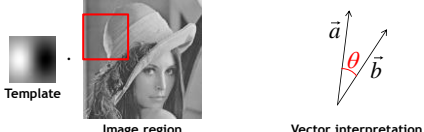

Template

Image region

Vector interpretation

Slide credit: Kristen Grauman B. Leibe

77

Computer Vision WS 14/15

RWTH AACHEN UNIVERSITY

Summary: Mask Properties

- Smoothing
 - Values positive
 - Sum to 1 \Rightarrow constant regions same as input
 - Amount of smoothing proportional to mask size
 - Remove "high-frequency" components; "low-pass" filter
- Filters act as templates
 - Highest response for regions that "look the most like the filter"
 - Dot product as correlation

Slide credit: Kristen Grauman B. Leibe

78

Computer Vision WS 14/15

RWTH AACHEN UNIVERSITY

Summary Linear Filters

- Linear filtering:
 - Form a new image whose pixels are a weighted sum of original pixel values
- Properties
 - Output is a shift-invariant function of the input (same at each image location)

Examples:

- Smoothing with a box filter
- Smoothing with a Gaussian
- Finding a derivative
- Searching for a template

Pyramid representations

- Important for describing and searching an image at all scales

Slide credit: Kristen Grauman B. Leibe

79

References and Further Reading

- Background information on linear filters and their connection with the Fourier transform can be found in Chapters 7 and 8 of
 - D. Forsyth, J. Ponce,
Computer Vision - A Modern Approach.
Prentice Hall, 2003

