

Computer Vision - Lecture 11

Sliding-Window based Object Detection II

01.12.2015

Bastian Leibe
 RWTH Aachen
<http://www.vision.rwth-aachen.de>
 leibe@vision.rwth-aachen.de

Course Outline

- Image Processing Basics
- Segmentation
 - Segmentation and Grouping
 - Segmentation as Energy Minimization
- Recognition & Categorization
 - Global Representations
 - Sliding-Window Object Detection
 - Image Classification
- Local Features & Matching
- 3D Reconstruction
- Motion and Tracking

Topics of This Lecture

- **Recap: Classification with SVMs**
 - Support Vector Machines
 - HOG Detector
- Classification with Boosting
 - AdaBoost
 - Viola-Jones Face Detection
- Discussion

Recap: Sliding-Window Object Detection

- If the object may be in a cluttered scene, slide a window around looking for it.



- Essentially, this is a brute-force approach with many local decisions.


Recap: Support Vector Machine (SVM)

- **Basic idea**
 - The SVM tries to find a classifier which maximizes the **margin** between pos. and neg. data points.
 - Up to now: consider linear classifiers

$$\mathbf{w}^T \mathbf{x} + b = 0$$
- **Formulation as a convex optimization problem**
 - Find the hyperplane satisfying


$$\arg \min_{\mathbf{w}, b} \frac{1}{2} \|\mathbf{w}\|^2$$
 under the constraints

$$t_n (\mathbf{w}^T \mathbf{x}_n + b) \geq 1 \quad \forall n$$
 based on training data points \mathbf{x}_n and target values $t_n \in \{-1, 1\}$.



Recap: Non-Linear SVMs


- **General idea:** The original input space can be mapped to some higher-dimensional feature space where the training set is separable:

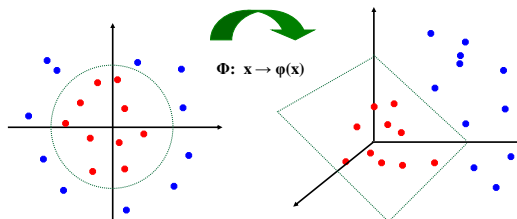

RWTH AACHEN UNIVERSITY

Recap: Gradient-based Representations

- Consider edges, contours, and (oriented) intensity gradients

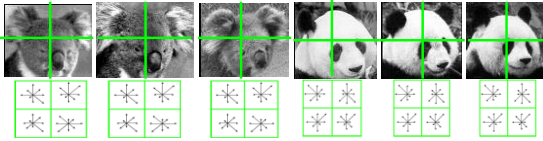


- Summarize local distribution of gradients with histogram
 - Locally orderless: offers invariance to small shifts and rotations
 - Contrast-normalization: try to correct for variable illumination

Computer Vision WS 15/16 7

Slide credit: Kristen Grauman B. Leibe

RWTH AACHEN UNIVERSITY

Recap: HOG Descriptor Processing Chain

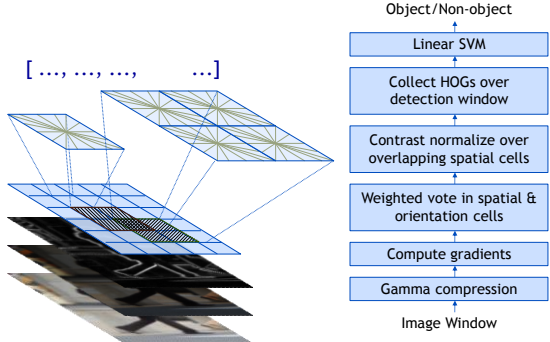


Computer Vision WS 15/16 8

Slide credit: Navneet Dalal

RWTH AACHEN UNIVERSITY

Recap: Pedestrian Detection with HOG

- Train a pedestrian template using a linear SVM
- At test time, convolve feature map with template

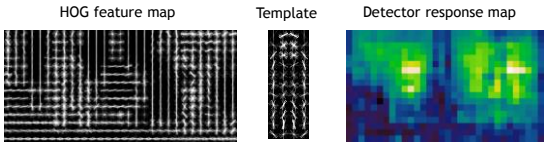


Computer Vision WS 15/16 10

N. Dalal and B. Triggs, [Histograms of Oriented Gradients for Human Detection](#), CVPR 2005

Slide credit: Svetlana Lazebnik

RWTH AACHEN UNIVERSITY

Recap: Non-Maximum Suppression

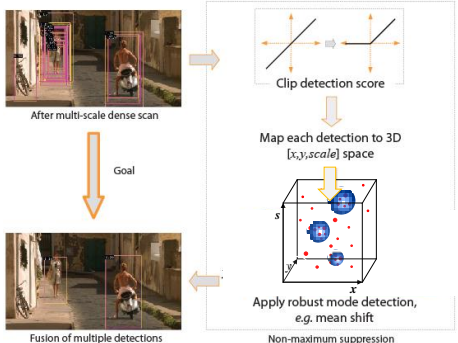


Computer Vision WS 15/16 10

B. Leibe Image source: Navneet Dalal, PhD Thesis

RWTH AACHEN UNIVERSITY

Applications: Mobile Robot Navigation




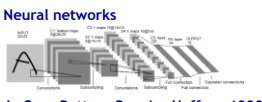



[link to the video](#)

Computer Vision WS 15/16 11

B. Leibe

RWTH AACHEN UNIVERSITY

Classifier Construction: Many Choices...

<p>Nearest Neighbor</p>  <p>Shakhnarovich, Viola, Darrell 2003 Berg, Berg, Malik 2005, Boiman, Shechtman, Irani 2008, ...</p>	<p>Neural networks</p>  <p>LeCun, Bottou, Bengio, Haffner 1998 Rowley, Baluja, Kanade 1998 ...</p>
<p>Boosting</p>  <p>Viola, Jones 2001, Torralba et al. 2004, Opelt et al. 2006, Benenson 2012, ...</p>	<p>Support Vector Machines</p>  <p>Vapnik, Schölkopf 1995, Papageorgiou, Poggio '01, Dalal, Triggs 2005, Vedaldi, Zisserman 2012</p>
<p>Randomized Forests</p>  <p>Amit, Geman 1997, Breiman 2001, Lepetit, Fua 2006, Gall, Lempitsky 2009, ...</p>	

Computer Vision WS 15/16 12

Slide adapted from Kristen Grauman B. Leibe

RWTH AACHEN UNIVERSITY

Boosting

- Build a strong classifier H by combining a number of “weak classifiers” h_1, \dots, h_M , which need only be better than chance.
- Sequential learning process: at each iteration, add a weak classifier
- Flexible to choice of weak learner
 - including fast simple classifiers that alone may be inaccurate
- We’ll look at Freund & Schapire’s AdaBoost algorithm
 - Easy to implement
 - Base learning algorithm for Viola-Jones face detector


Y. Freund and R. Schapire, [A short introduction to boosting](#), *Journal of Japanese Society for Artificial Intelligence*, 14(5):771-780, 1999.

Slide credit: Kristen Grauman B. Leibe

13

RWTH AACHEN UNIVERSITY

AdaBoost: Intuition



Consider a 2D feature space with **positive** and **negative** examples.

Each weak classifier splits the training examples with at least 50% accuracy.

Examples misclassified by a previous weak learner are given more emphasis at future rounds.


Figure adapted from Freund and Schapire

Slide credit: Kristen Grauman B. Leibe

14

RWTH AACHEN UNIVERSITY

AdaBoost: Intuition

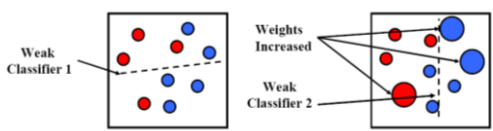

Weak Classifier 1

Weights Increased


Weak Classifier 2

Slide credit: Kristen Grauman B. Leibe

15

RWTH AACHEN UNIVERSITY

AdaBoost: Intuition

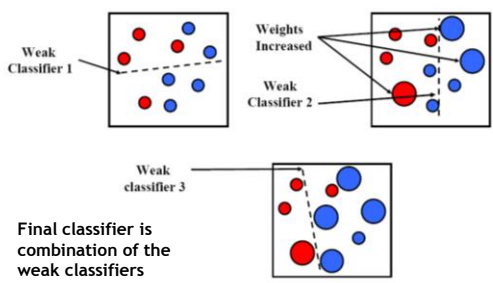

Weak Classifier 1

Weights Increased

Weak Classifier 2

Weak classifier 3

Final classifier is combination of the weak classifiers

Slide credit: Kristen Grauman B. Leibe

16

RWTH AACHEN UNIVERSITY

AdaBoost - Formalization

- 2-class classification problem
 - Given: training set $\mathbf{X} = \{\mathbf{x}_1, \dots, \mathbf{x}_N\}$ with target values $\mathbf{T} = \{t_1, \dots, t_N\}$, $t_n \in \{-1, 1\}$.
 - Associated weights $\mathbf{W} = \{w_1, \dots, w_N\}$ for each training point.
- Basic steps
 - In each iteration, AdaBoost trains a new weak classifier $h_m(\mathbf{x})$ based on the current weighting coefficients $\mathbf{W}^{(m)}$.
 - We then adapt the weighting coefficients for each point
 - Increase w_n if \mathbf{x}_n was misclassified by $h_m(\mathbf{x})$.
 - Decrease w_n if \mathbf{x}_n was classified correctly by $h_m(\mathbf{x})$.
 - Make predictions using the final combined model

$$H(\mathbf{x}) = \text{sign} \left(\sum_{m=1}^M \alpha_m h_m(\mathbf{x}) \right)$$

Slide credit: Kristen Grauman B. Leibe

18

RWTH AACHEN UNIVERSITY

AdaBoost: Detailed Training Algorithm

- Initialization: Set $w_n^{(1)} = \frac{1}{N}$ for $n = 1, \dots, N$.
- For $m = 1, \dots, M$ iterations
 - Train a new weak classifier $h_m(\mathbf{x})$ using the current weighting coefficients $\mathbf{W}^{(m)}$ by minimizing the weighted error function

$$J_m = \sum_{n=1}^N w_n^{(m)} I(h_m(\mathbf{x}_n) \neq t_n) \quad I(A) = \begin{cases} 1, & \text{if } A \text{ is true} \\ 0, & \text{else} \end{cases}$$
 - Estimate the weighted error of this classifier on \mathbf{X} :

$$\epsilon_m = \frac{\sum_{n=1}^N w_n^{(m)} I(h_m(\mathbf{x}_n) \neq t_n)}{\sum_{n=1}^N w_n^{(m)}}$$
 - Calculate a weighting coefficient for $h_m(\mathbf{x})$:

$$\alpha_m = \ln \left\{ \frac{1 - \epsilon_m}{\epsilon_m} \right\}$$
 - Update the weighting coefficients:

$$w_n^{(m+1)} = w_n^{(m)} \exp \{ \alpha_m I(h_m(\mathbf{x}_n) \neq t_n) \}$$

Slide credit: Kristen Grauman B. Leibe

19

Computer Vision WS 15/16

AdaBoost: Recognition

- Evaluate all selected weak classifiers on test data.

$$h_1(x), \dots, h_m(x)$$
- Final classifier is weighted combination of selected weak classifiers:

$$H(x) = \text{sign} \left(\sum_{m=1}^M \alpha_m h_m(x) \right)$$
- Very simple procedure!
 - Less than 10 lines in Matlab!
 - But works extremely well in practice...


RWTH AACHEN UNIVERSITY

20

Computer Vision WS 15/16

Example: Face Detection

- Frontal faces are a good example of a class where global appearance models + a sliding window detection approach fit well:
 - Regular 2D structure
 - Center of face almost shaped like a "patch"/window



- Now we'll take AdaBoost and see how the Viola-Jones face detector works

RWTH AACHEN UNIVERSITY


Slide credit: Kristen Grauman B. Leibe

21

Computer Vision WS 15/16

Feature extraction


"Rectangular" filters



Feature output is difference between adjacent regions

Efficiently computable with integral image: any sum can be computed in constant time

Avoid scaling images → scale features directly for same cost

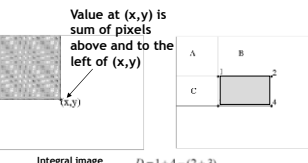

Value at (x,y) is sum of pixels above and to the left of (x,y)

$$D = 1 + 4 - (2 + 3) = A + (A + B + C + D) - (A + C + A + B) = D$$


RWTH AACHEN UNIVERSITY

Slide credit: Kristen Grauman B. Leibe [Viola & Jones, CVPR 2001]

22

Computer Vision WS 15/16

Example

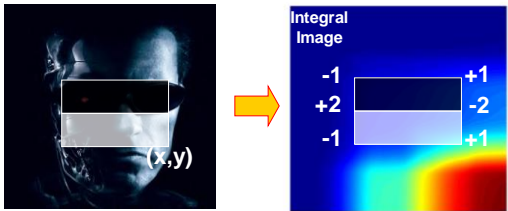

Integral Image


RWTH AACHEN UNIVERSITY

Slide credit: Svetlana Lazebnik B. Leibe

23

Computer Vision WS 15/16

Large Library of Filters

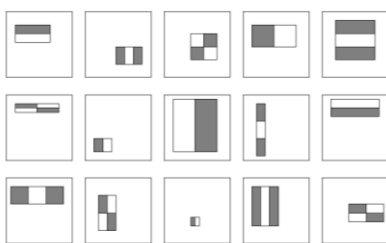

Considering all possible filter parameters: position, scale, and type: 180,000+ possible features associated with each 24 x 24 window

Use AdaBoost both to select the informative features and to form the classifier

Weak classifier: filter output > θ ?

RWTH AACHEN UNIVERSITY


Slide credit: Kristen Grauman B. Leibe [Viola & Jones, CVPR 2001]

24

Computer Vision WS 15/16

AdaBoost for Feature+Classifier Selection

- Want to select the single rectangle feature and threshold that best separates positive (faces) and negative (non-faces) training examples, in terms of weighted error.

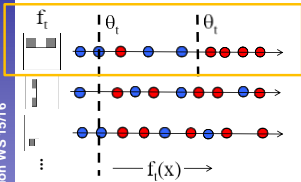

Resulting weak classifier:

$$h_i(x) = \begin{cases} +1 & \text{if } f_i(x) > \theta_i \\ -1 & \text{otherwise} \end{cases}$$

For next round, reweight the examples according to errors, choose another filter/threshold combo.

Outputs of a possible rectangle feature on faces and non-faces.

RWTH AACHEN UNIVERSITY

Slide credit: Kristen Grauman B. Leibe [Viola & Jones, CVPR 2001]

25

RWTH AACHEN UNIVERSITY

AdaBoost for Efficient Feature Selection

- Image features = weak classifiers
- For each round of boosting:
 - Evaluate each rectangle filter on each example
 - Sort examples by filter values
 - Select best threshold for each filter (min error)
 - Sorted list can be quickly scanned for the optimal threshold
 - Select best filter/threshold combination
 - Weight on this features is a simple function of error rate
 - Reweight examples

P. Viola, M. Jones, Robust Real-Time Face Detection, IJCV, Vol. 57(2), 2004. (first version appeared at CVPR 2001)

Slide credit: Kristen Grauman B. Leibe

RWTH AACHEN UNIVERSITY

Cascading Classifiers for Detection

- Even if the filters are fast to compute, each new image has a lot of possible windows to search.
- For efficiency, apply less accurate but faster classifiers first to immediately discard windows that clearly appear to be negative; e.g.,
 - Filter for promising regions with an initial inexpensive classifier
 - Build a chain of classifiers, choosing cheap ones with low false negative rates early in the chain

[Fleuret & Geman, IJCV 2001]
[Rowley et al., PAMI 1998]
[Viola & Jones, CVPR 2001]

Slide credit: Kristen Grauman B. Leibe Figure from Viola & Jones CVPR 2001

RWTH AACHEN UNIVERSITY

Cascading Classifiers

- Chain classifiers that are progressively more complex and have lower false positive rates:

Slide credit: Svetlana Lazebnik

RWTH AACHEN UNIVERSITY

Viola-Jones Face Detector: Summary

- Train with 5K positives, 350M negatives
- Real-time detector using 38 layer cascade
- 6061 features in final layer
- [Implementation available in OpenCV: <http://sourceforge.net/projects/opencvlibrary/>]

Slide credit: Kristen Grauman B. Leibe

RWTH AACHEN UNIVERSITY

Practical Issue: Bootstrapping

- Problem: 1 face in 116'440 examined windows
 - Can easily find negative examples, but which ones are useful?
 - Apply iterative training approach
 - False positives on negative validation images are included in training set as "hard negatives"

Slide adapted from Bernd Heisele

RWTH AACHEN UNIVERSITY

Viola-Jones Face Detector: Results

Slide credit: Kristen Grauman B. Leibe

RWTH AACHEN UNIVERSITY

Viola-Jones Face Detector: Results

Computer Vision WS 15/16

Slide credit: Kristen Grauman B. Leibe

33

RWTH AACHEN UNIVERSITY

Viola-Jones Face Detector: Results

Computer Vision WS 15/16

Slide credit: Kristen Grauman B. Leibe

34

RWTH AACHEN UNIVERSITY

You Can Try It At Home...

- The Viola & Jones detector was a huge success
 - First real-time face detector available
 - Many derivative works and improvements
- C++ implementation available in OpenCV [Lienhart, 2002]
 - <http://sourceforge.net/projects/opencvlibrary/>
- Matlab wrappers for OpenCV code available, e.g. here
 - <http://www.mathworks.com/matlabcentral/fileexchange/19912>

P. Viola, M. Jones, **Robust Real-Time Face Detection**, IJCV, Vol. 57(2), 2004

Computer Vision WS 15/16

Slide credit: Kristen Grauman B. Leibe

35

RWTH AACHEN UNIVERSITY

Example Application

Frontal faces detected and then tracked, character names inferred with alignment of script and subtitles.

Everingham, M., Sivic, J. and Zisserman, A. "Hello! My name is... Buffy" - Automatic naming of characters in TV video, BMVC 2006. <http://www.robots.ox.ac.uk/~vgg/research/nface/index.html>

Computer Vision WS 15/16

Slide credit: Kristen Grauman B. Leibe

36

RWTH AACHEN UNIVERSITY

Summary: Sliding-Windows

- **Pros**
 - Simple detection protocol to implement
 - Good feature choices critical
 - Past successes for certain classes
 - Good detectors available (Viola & Jones, HOG, etc.)
- **Cons/Limitations**
 - High computational complexity
 - For example: 250,000 locations x 30 orientations x 4 scales = 30,000,000 evaluations!
 - This puts tight constraints on the classifiers we can use.
 - If training binary detectors independently, this means cost increases linearly with number of classes.
 - With so many windows, false positive rate better be low

Computer Vision WS 15/16

Slide credit: Kristen Grauman B. Leibe

37


RWTH AACHEN UNIVERSITY

Feature Computation Trade-Off

- **Linear SVM Detectors**
 - Same computations performed for each image window
 - It pays off to precompute the features once
 - Complex features can be used
- **AdaBoost Cascaded Detectors**
 - Potentially different computations for each window location
 - May be more efficient to evaluate the features on-the-fly for each image window
 - If cascading shall be used, simple features are preferable



Computer Vision WS 15/16

38

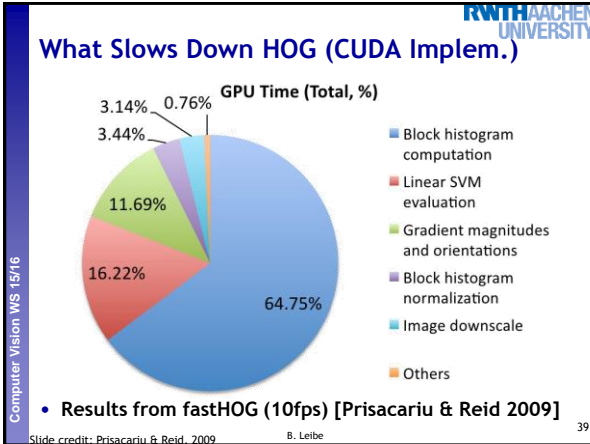

- ### Limitations: Low Training Resolutions
- Many (older) S/W detectors operate on tiny images
 - Viola&Jones: 24x24 pixels
 - Torralba et al.: 32x32 pixels
 - Dalal&Triggs: 64x96 pixels (notable exception)
 - Main reasons
 - Training efficiency (exhaustive feature selection in AdaBoost)
 - Evaluation speed
 - Want to recognize objects at small scales
 - But...
 - Limited information content available at those resolutions
 - Not enough support to compensate for occlusions!

- ### Limitations: Changing Aspect Ratios
- Sliding window requires fixed window size
 - Basis for learning efficient cascade classifier
 - How to deal with changing aspect ratios?
 - Fixed window size
 - Wastes training dimensions
 - Adapted window size
 - Difficult to share features
 - "Squashed" views [Dalal&Triggs]
 - Need to squash test image, too

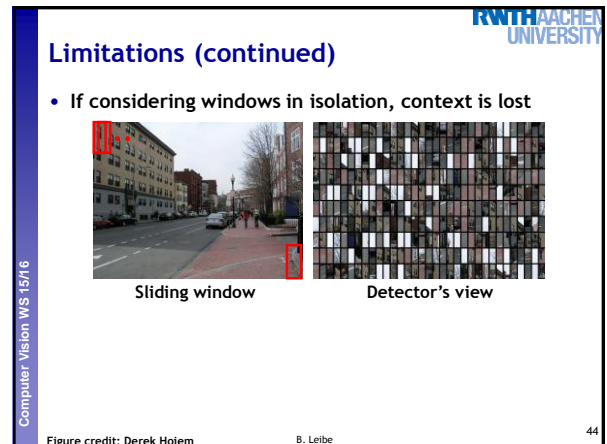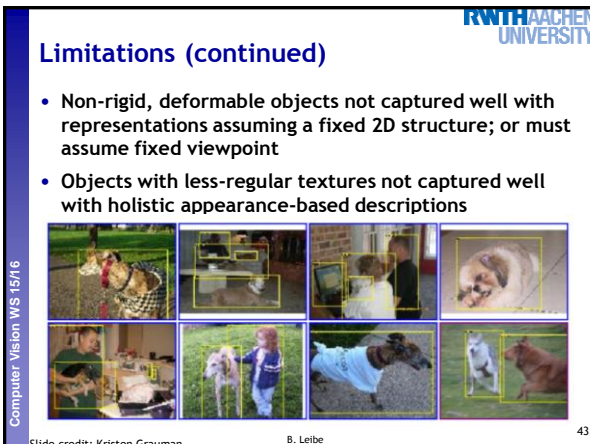

Limitations (continued)

- In practice, often entails large, cropped training set (expensive)
- Requiring good match to a global appearance description can lead to sensitivity to partial occlusions



Image credit: Adam, Rivlin, & Shimshoni

K. Grauman, B. Leibe

45

References and Further Reading

- Read the Viola-Jones paper
 - P. Viola, M. Jones,
[Robust Real-Time Face Detection](#),
IJCV, Vol. 57(2), 2004.
(first version appeared at CVPR 2001)
- Viola-Jones Face Detector
 - C++ implementation available in OpenCV [Lienhart, 2002]
 - <http://sourceforge.net/projects/opencvlibrary/>
 - Matlab wrappers for OpenCV code available, e.g. here
 - <http://www.mathworks.com/matlabcentral/fileexchange/19912>
- HOG Detector
 - Code available: <http://pascal.inrialpes.fr/soft/olt/>